

## PLS2 Series

### Petroleum Luminaire Series



#### Product Description

The low profile design of the PLS2 Series Low Glare LED Petroleum luminaire is designed to exceed standards for all petroleum applications with the lowest possible power consumption. The new Low Glare design keeps light pleasant for patrons while maintaining great coverage. The durable and robust design allows for simple installation. Delivering up to 23,395 lumens while only consuming 190 watts, it's the ideal solution for petroleum stations.

Applications: Petroleum station lighting.

#### Product Performance

- Wattage: 190W
- Input Voltage: 120-277VAC, 277-480VAC
- CCT: 3000K - 5000K
- CRI: Minimum 70 CRI
- UL1598 Compliant
- IP66 Rated
- 5 year Warranty

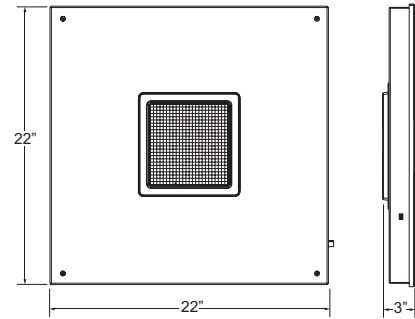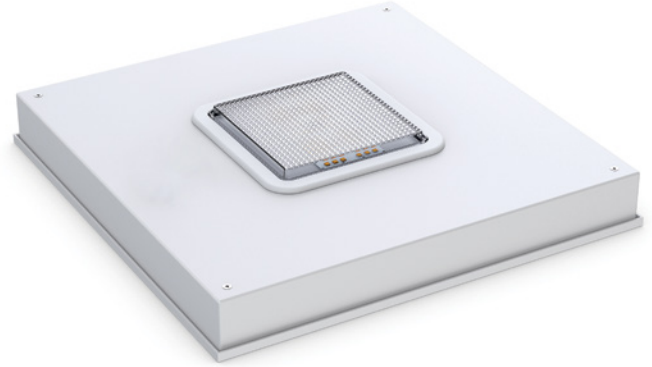

Fixture Weight: 15 lbs

#### Ordering Guide

Example: PLS2-DP24050K7-WH-OC1

PLS2-	-DP	XXX	XXK		-XX	-OC1
Product Series	Distribution	Lumen Output Type	CCT Code	Voltage	Fixture Color	Options
PLS2 - 22"	DP - Diffused Canopy	240 - 23,395 Lumens, 190W	30K8 - 3000K, 80 CRI 40K7 - 4000K, 70 CRI 50K7 - 5000K, 70 CRI	(Blank) - 120-277V UH - 277-480V	WH - White BZ - Bronze SV - Silver	OC1 - Occupancy Sensor

#### Accessories (Field installed, order as separate line item)

Accessory Number	Description
PL-TP2424	24" x 24" Beauty Plate Kit (with 4" Center Hole)
PL-TP2626	26" x 26" Beauty Plate Kit (with 4" Center Hole)
PL-TP2632	26" x 32" Beauty Plate Kit (with 4" Center Hole)
PL-JBS01	Junction Box Kit (includes J-Box and Stem)



## PLS2 Series

### Product Specifications

#### Construction & Materials

- Powder Coated Aluminum Housing
- UV Stabilized single Polycarbonate Lens
- Robust low profile design with active thermal management
- Petroleum mounting open canopy

#### Optical System

- DP Lens - Type V Low Glare Medium Canopy Lens

#### Electrical System

- Input Voltage: 120-277VAC or 277-480VAC
- Power Factor: > 0.95
- Total Harmonic Distortion: ≤10%
- Operating Temperature Range: -40°C to 60°C
- Standard Surge Suppression: 10Kv

#### Testing & Certifications


- UL1598, CSA STD.22.2 compliant
- IP66 Rated
- RoHS Compliant
- FCC Compliant
- DesignLights Consortium® Qualified Product

#### Lumen Maintenance

- L90@ 25C >50,000 hours

### Photometry

All published photometric testing data is performed to IESNA LM79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project contact sales@eluminaire.com.

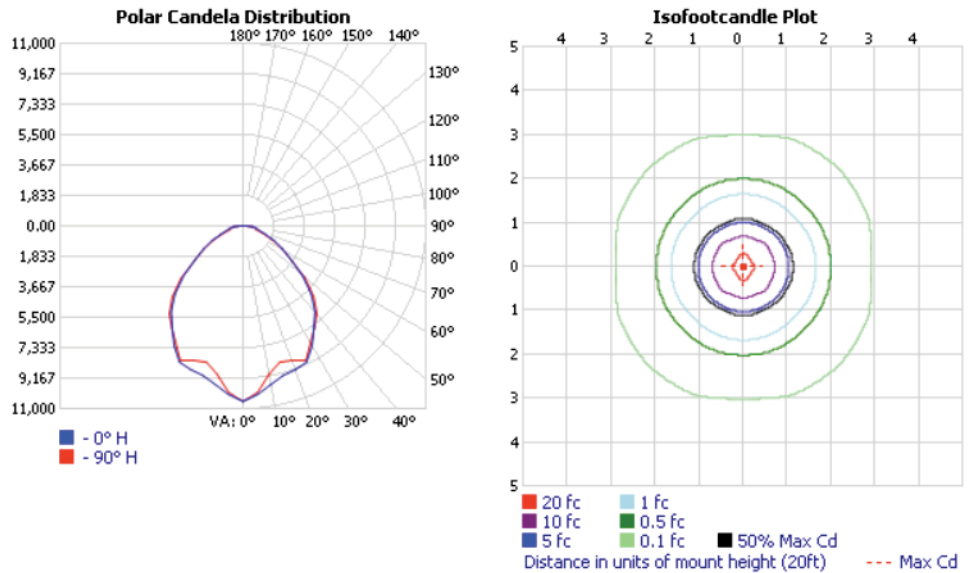

eluminaire maintains a tolerance of +/- 7% on flux and power measurement. The information in this document is subject to change without notice.

### Diffused Canopy Distribution

Fixture Configuration	Lumens	Lumens Per Watt	Wattage	CCT	CRI	BUG
PLS2-DP-240-30K8-XX	20,372	106	192	3000K	80	B3-U2-G2
PLS2-DP-240-40K7-XX	23,395	123	190	4000K	70	B3-U2-G2
PLS2-DP-240-50K7-XX	23,395	123	190	5000K	70	B3-U2-G2
PLS2-DP-240-30K8-UH-XX	20,214	102	198	3000K	80	B3-U2-G2
PLS2-DP-240-40K7-UH-XX	24,157	122	198	4000K	70	B3-U2-G2
PLS2-DP-240-50K7-UH-XX	24,157	122	198	5000K	70	B3-U2-G2